



MPC Pipsqueak

Body Tube:	MPC T-15/8	8" Long (Use QUEST T15) .59 OD .55 ID
Balsa nose cone:	MPC NC-15	1.75" Long exposed cone (Use BMS semi custom cone) .4" Long shoulder .54 shoulder Dia.
Engine mount tube:	MPC T-14	2.3" L Use ESTES BT-5 .54 OD .52 ID
Thrust Ring	TR-14	.19L Use ESTES EB-5 .54 OD
Shock Chord:		18" string (!) Use 1/8" elastic
Shock Chord Mount:		1.0" x .25" light cardstock 3 holes .08" Dia @ .25, .5, & .75" (Use Kevlar loop around thrust ring)
Screw Eye		.75" long .25 " eye
Launch Lug		1/8" x 1"
Streamer		(Use orange Surveyor's tape)
Fins 1/6" balsa.		

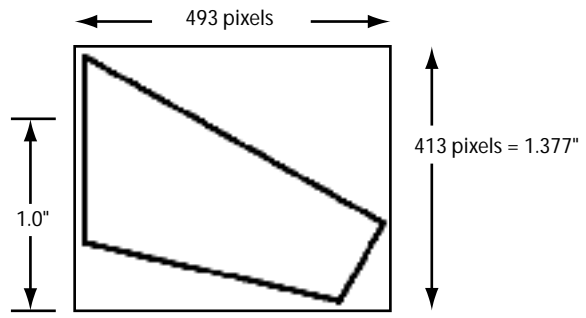

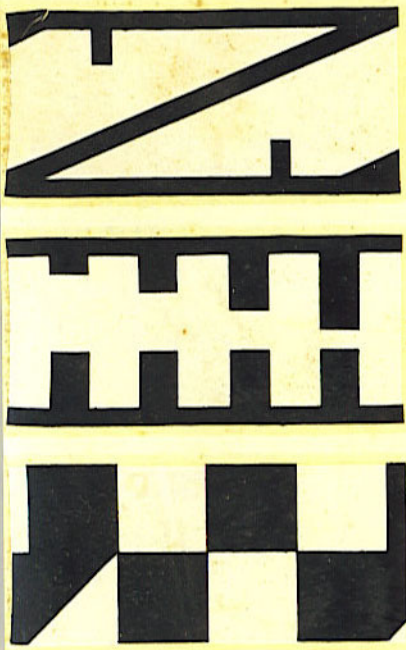

UNITED STATES

UNITED STATES

UNITED STATES

UNITED STATES

UNITED STATES



1234567890

UNITED STATES

